

# ANALYSIS AND DESIGN OF OPEN PLANAR TRANSMISSION LINES

Ján Zehentner, Jan Mrkvica, Jan Macháč  
Czech Technical University, Technická 2, 16627 Prague 6, Czech Republic

## INTRODUCTION

A transmission line is a technical tool for transferring power from one place to another. Low losses, negligible signal distortion, high transmitted power capability, electromagnetic compatibility, wide operational frequency band, high electromagnetic resistance and pure dominant mode propagation are requirements set on any kind of transmission line. Closed transmission lines, such as waveguides or coaxial lines, satisfy all the above mentioned demands. In contrast, open transmission lines, such as two wire lines, striplines, microstrip lines, image guides, uniplanar lines, etc., have reduced transmitted power, higher losses, lower electromagnetic resistance, cross-talk to neighbouring circuits and occasionally strong dispersion. Short sections of transmission lines are basic circuit elements, and in this case they have the appearance of a printed circuit line. A change in their cross-sectional size, material parameters or bending from the straight direction results in many types of inhomogeneities, which form sources of undesired radiation, power leakage and propagation of higher modes. Generally available professional SW packages devoted to analysis and design of these lines mostly have not taken these effects into consideration, as has already been observed and commented [1]. They provide solutions satisfactory only for the purely bound modes at low frequencies. At higher frequencies, when leakage effects or higher order modes appear, the designer must either accept the limits of the code validity, or rely on the obtained results without being able to check them. This factor in many cases leads to discrepancies between theoretically predicted and measured characteristics of circuits or systems containing active devices or passive elements.

The aim of this paper is to fill in the gap in the code supply accessible to researchers involved in problems related to the analysis and design of planar transmission lines in wide frequency bands. Our principal approach to this task is based on the spectral domain method applied to printed circuit lines made on dielectric substrates. The APTL (Analysis of Planar Transmission Lines) package contains an analysis of 18 different planar transmission lines the cross-sections of which are shown in Fig. 1. The code provides the frequency-dependent propagation constant of a selected mode, the characteristic impedance when it can be defined, the field distribution in the cross-section and the distribution of the transversal field component within a slot, or the current density component on the strip.

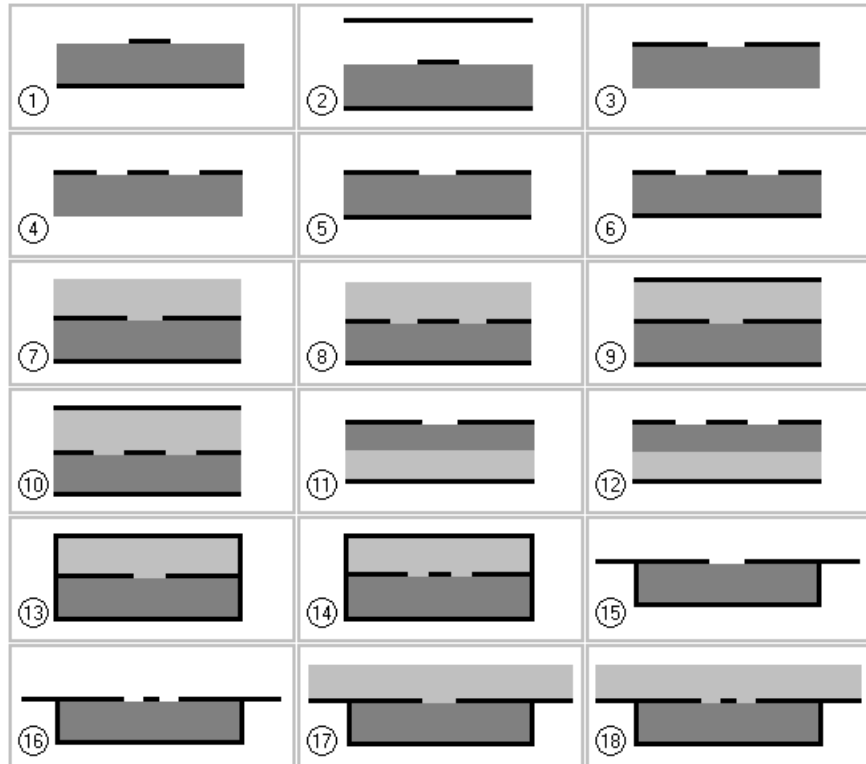


Fig. 1 Cross-sections of planar transmission lines analyzed by the APTL program.

## THEORETICAL BACKGROUND

The spectral domain approach was introduced and demonstrated on a shielded microstrip line in [2]. An analogous derivation was presented for the slotline [3] and summarized in [4]. Analysis in the same manner of a coplanar waveguide was performed in [5]. Several crucial points lie in the calculation of the propagation constant and in the reconstruction of the modal fields. We distinguish even and odd modes according to the transversal component of the electric field  $E_x(x)$  within the slot parallel to the slot plane with regard to the slot axis, or according to the transversal component of the current density  $J_x(x)$  on the strip with respect to the strip axis.

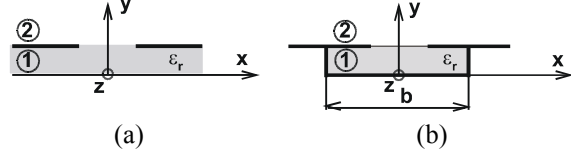


Fig. 2 Cross-section of a slotline (a) and conductor-backed slotline with the finite width of the substrate metallized on the side walls (b).

Let Hertz's electric  $\Phi^e$  and magnetic  $\Phi^m$  potential represent the electric  $\mathbf{E}$  and magnetic  $\mathbf{H}$  field on the transmission line. In the laterally unbounded regions, e.g.,  $\textcircled{2}$  and  $\textcircled{1}$  in Fig. 2a, or  $\textcircled{1}$  in Fig. 2b, we choose  $\Phi^e$ ,  $\Phi^m$  in the  $y$ -direction, while in the laterally bound regions, e.g.,  $\textcircled{2}$  in Fig. 2b, they are taken in the  $z$ -direction. Hereafter we will drop the upper indices of the potentials. Then the Fourier transform  $\tilde{\Phi}$  of the original  $\Phi$  with respect to the  $x$ -axis is

$$\tilde{\Phi}(\xi, y, z) = \int_{-\infty}^{\infty} \Phi(x, y, z) e^{-j\xi x} dx \quad (1)$$

and in the bound region

$$\tilde{\Phi}(\xi_n, y, z) = \frac{2}{b} \int_{-b/2}^{b/2} \Phi(x, y, z) e^{-j\xi_n x} dx \quad (2)$$

where

$$\xi_n = \begin{cases} 2n\pi/b & \text{even modes} \\ (2n-1)\pi/b & \text{odd modes} \end{cases} \quad (3)$$

and  $n=0, \forall 1, \forall 2, \dots 4$ . The backward Fourier transform provides the original potential

$$\Phi(x, y, z) = \frac{1}{2\pi} \int_{-\infty}^{\infty} \tilde{\Phi}(\xi, y, z) e^{j\xi x} d\xi \quad (4)$$

and

$$\Phi(x, y, z) = \frac{1}{2} \sum_{n=-\infty}^{\infty} \tilde{\Phi}(\xi_n, y, z) e^{j\xi_n x} \quad (5)$$

The propagation constant of a particular mode is a solution of the dispersion equation obtained from the boundary conditions on the interface of media carrying conductive strips applied in the Fourier transformed domain. This homogeneous determinant equation contains integrals consisting of Green's functions and basis functions, both in the spectral domain.

In the space domain we use a sinusoidal function modified by an edge-condition term as the basis functions. For odd modes on a microstrip line and on modifications of a microstrip line

$$j_{xn}(x) = \frac{\sin[2n\pi x / w]}{\sqrt{1 - (2x/w)^2}} \quad n=1,2,3,\dots \quad (6)$$

$$j_{zn}(x) = \frac{\cos[2(n-1)\pi x / w]}{\sqrt{1 - (2x/w)^2}} \quad n=1,2,3,\dots \quad (7)$$

where  $w$  denotes the strip width. On a slotline and on modifications of a slotline for even modes

$$e_{xn}(x) = \frac{\cos[2(n-1)\pi x / w]}{\sqrt{1 - (2x/w)^2}} \quad n=1,2,3,\dots \quad (8)$$

$$e_{zn}(x) = \frac{\sin[2n\pi x / w]}{\sqrt{1 - (2x/w)^2}} \quad n=1,2,3,\dots \quad (9)$$

while for odd modes

$$e_{xn}(x) = \frac{\sin[(2n-1)\pi x / w]}{\sqrt{1 - (2x/w)^2}} \quad n=1,2,3,\dots \quad (10)$$

$$e_{zn}(x) = \frac{\cos[(2n-1)\pi x / w]}{\sqrt{1 - (2x/w)^2}} \quad n=1,2,3,\dots \quad (11)$$

where  $w$  is the slot width. For a coplanar waveguide with the center strip width  $s$  and the slot width  $w$  for even modes

$$e_{xn}(x) = \pm \frac{\cos[n\pi(x \pm p) / w]}{\sqrt{1 - [2(x \pm p) / w]^2}} \quad n=0,2,4,\dots \quad (12)$$

$$e_{zn}(x) = \frac{\cos[n\pi(x \pm p) / w]}{\sqrt{1 - [2(x \pm p) / w]^2}} \quad n=1,3,5,\dots \quad (13)$$

while for odd modes

$$e_{xn}(x) = \frac{\sin[n\pi(x \pm p) / w]}{\sqrt{1 - [2(x \pm p) / w]^2}} \quad n=1,3,5,\dots \quad (14)$$

$$e_{zn}(x) = \pm \frac{\sin[n\pi(x \pm p) / w]}{\sqrt{1 - [2(x \pm p) / w]^2}} \quad n=0,2,4,\dots \quad (15)$$

where  $p=s/2+w/2$ , the upper sign holds for  $x<0$  and the lower sign is valid for  $x>0$ .

The path of integration determines the propagation constant of the constituent modes. We integrate them in the complex plane of the spectral variable  $\xi$ . Once the propagation constant is known, the amplitudes of the basis functions can be computed. By the backward Fourier transform we get the field distribution and again the choice of the integration path determines the field of the selected mode. The integrands in question have poles and branch points. Therefore in the first step the code calculates these singular points and the user picks the required mode. Integration along the real axis leads to the dominant mode, while integration encompassing one or more poles provides a mode leaking power into the substrate. When in addition the integration path is round the branch point we get a space leaky mode.

Since the choice of the basis function and the number of basis functions influence the final results, the user can make sure of the proper field distribution in the slot, or the current density on the strip. The total picture of the field on the plane transversal to the line axis then confirms the expected mode. For a better image, 3D visualization is available. The characteristic impedance of the bound modes is

calculated by its power-current definition for lines with strips, and by the power-voltage definition for lines with slots.

Normalization of the propagation constant to the wave number of the free space and normalization of the frequency to the substrate thickness ensure validity of the results in wide frequency bands. At the moment the code contains an analysis of 18 lines the cross-sections of which are shown in Fig. 1. Particular subroutines and their convergence have been tested with respect to the number of selected basis functions and the upper limits of integration and addition of terms in the series.

## ILLUSTRATIONS OF THE APTL PROGRAM OUTPUTS

Selected examples of the APTL program outputs are presented in order to acquire a better view of its function. Typical dispersion characteristics, i. e., normalized phase  $\beta/k_0$  and leakage  $\alpha/k_0$  constants of the microstrip line encompassing the dominant bound mode and surface leaky mode are shown in Fig. 3. The characteristic impedance of the line is plotted in Fig. 4. The electric field of the dominant bound mode of the microstrip line on the cross-sectional plane is plotted in Fig. 5. The dispersion characteristics of a slotline with a wide slot are drawn in Fig. 6 and encompass the even dominant bound mode, the first higher order odd bound mode and the first odd space leaky mode. The transversal electric field components within the slot for the dominant bound mode and the first space leaky mode are sketched in Fig. 7. The phase constant of the bound mode and the characteristic impedance of a slotline with narrow slot are illustrated in Fig. 8. The electric field of the even dominant bound mode on the cross-sectional plane of the slotline is shown in Fig. 9, while Fig. 10 shows the electric field of the surface leaky mode. The electric field of the first space leaky mode on the slotline determined in Fig. 6 is shown in Fig. 11. The dispersion characteristics of a coplanar waveguide, ④ in Fig. 1, for the bound mode and first substrate leaky mode are shown in Fig. 12. The characteristic impedance of the dominant bound mode propagating on the coplanar waveguide is given in Fig. 13. Fig. 14 represents the electrical field distribution on the transversal plane of that line. When the permittivity is the same in the whole cross-section of the completely shielded conductor-backed slotline, ③ in Fig. 1, we have a waveguide with conductive slotted partition in the H plane. The dispersion characteristics of the even dominant slot type and waveguide type modes are drawn in Fig. 15. The characteristic impedance of that line, and also of the line with the modified cross-sectional size, is shown in Fig. 16. The electric field of the even slot type dominant mode on the transversal plane of the wide slotted line is shown in Fig. 17. The electric field of the even perturbed waveguide type dominant mode on the cross-sectional plane of the wide slotted line is given in Fig. 18.

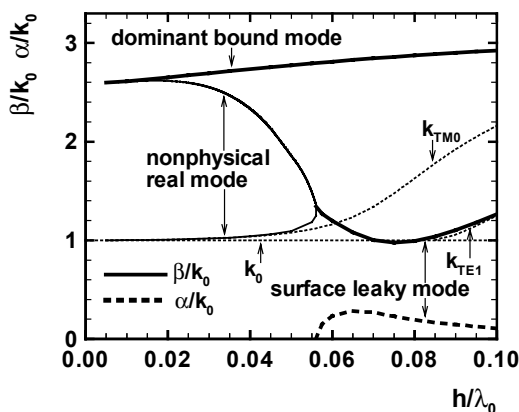


Fig. 3 Dispersion characteristics of the microstrip line, ① in Fig. 1, with strip width  $w=0.6$  mm, substrate thickness  $h=0.635$  mm and permittivity  $\epsilon_r=10$ .

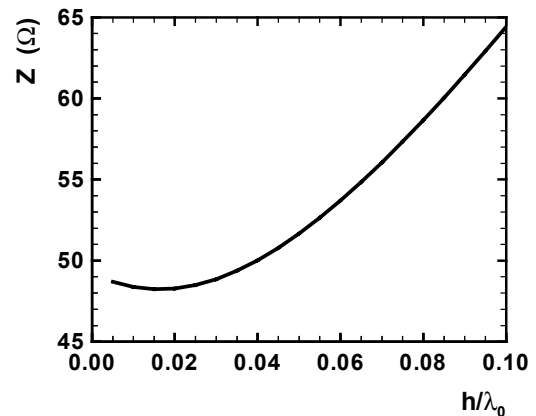


Fig. 4 The characteristic impedance of the microstrip line specified in Fig. 3.

The APTL program is still under development and is undergoing additional testing. It is a simple way to find out whether the line transmits a bound mode, the width of the pure bound mode propagation, the characteristic impedance, and the setting up of the first and higher order leaky modes. 2D or 3D visualization of the field distribution enables a better understanding of its behaviour on the

investigated lines. The full wave approach provides more trustworthy results than do the quasi-TEM approach or analytical-experienced solutions. It turned out that lines with wide slots or wide strips are suitable for space leakage, particularly when an odd space leaky mode is excited. They can be applied as radiators or in arrays. A completely shielded conductor-backed slotline retains the merits of waveguides combined with planar technology.

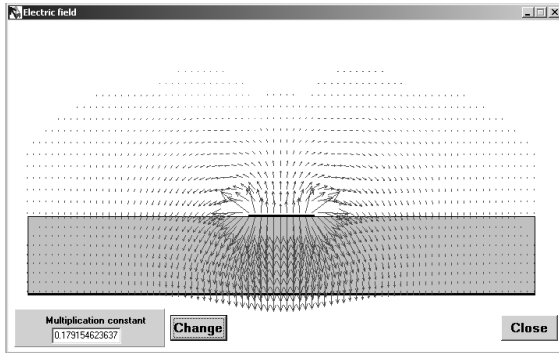


Fig. 5 Electric field of the dominant bound mode on the cross-sectional plane of the microstrip line, ① in Fig. 1, when  $w=1$  mm,  $h=1$  mm and  $\epsilon_r=2.2$ .

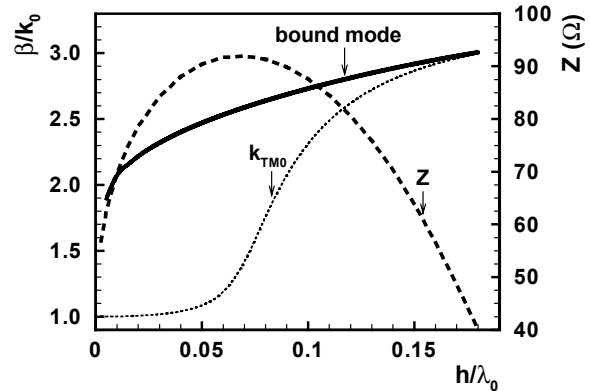


Fig. 8 Phase constant of the dominant bound mode and the characteristic impedance of a slotline, ③ in Fig. 1, with  $w=0.15$  mm,  $h=0.625$  mm and  $\epsilon_r=10.8$ .

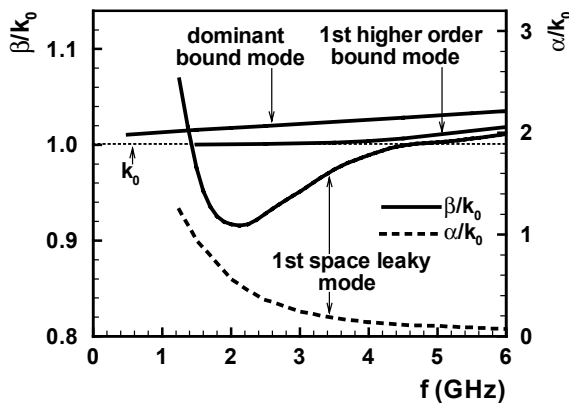


Fig. 6 Dispersion characteristics of a slotline, ③ in Fig. 1, with slot width  $w=60$  mm, substrate thickness  $h=1.2$  mm and permittivity  $\epsilon_r=2.6$ .

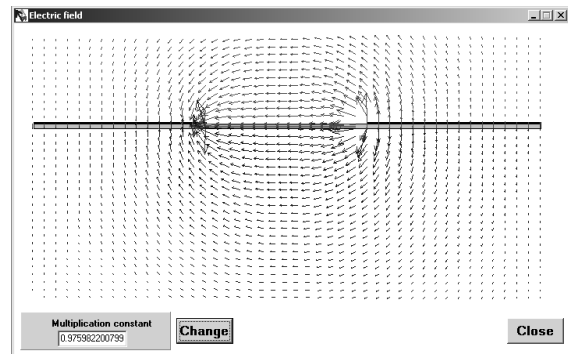


Fig. 9 Electric field of the even dominant bound mode on the slotline specified in Fig. 6 at  $h/\lambda_0=0.012$ .

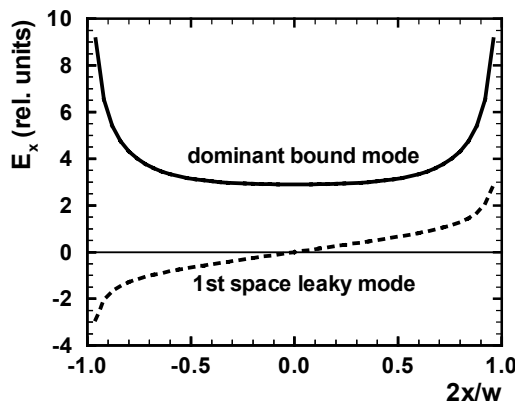


Fig. 7 Transversal electric field component within the slot of the slotline specified in Fig. 6 when  $h/\lambda_0=0.012$ .

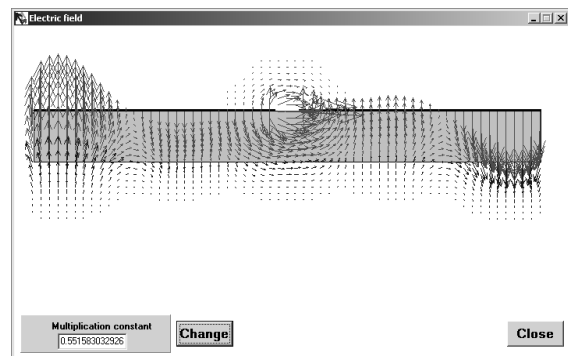


Fig. 10 Electric field of the even surface leaky mode on a slotline with  $w=5.65$  mm,  $h=14.6$  mm,  $\epsilon_r=2.6$  and  $h/\lambda_0=0.4$ .

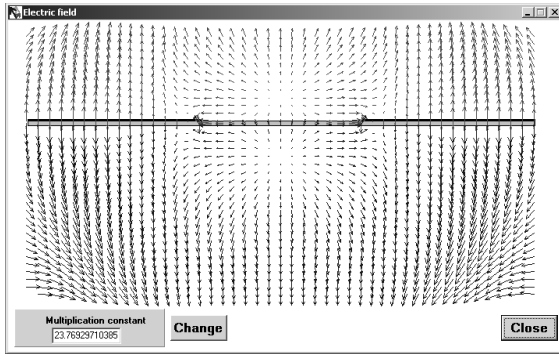


Fig. 11 Electric field of the odd 1st space leaky mode on the slotline specified in Fig. 6 at  $h/\lambda_0=0.012$ .

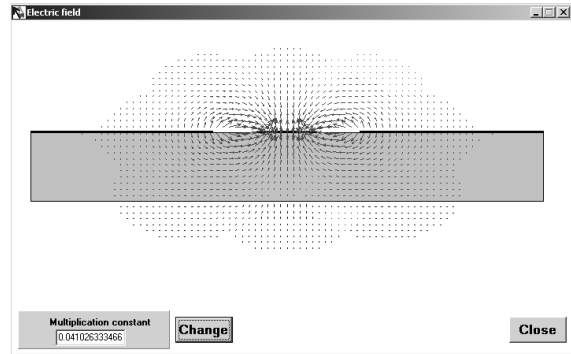


Fig. 14 Electric field of the dominant bound mode on the cross-sectional plane of the coplanar waveguide specified in Fig. 12.

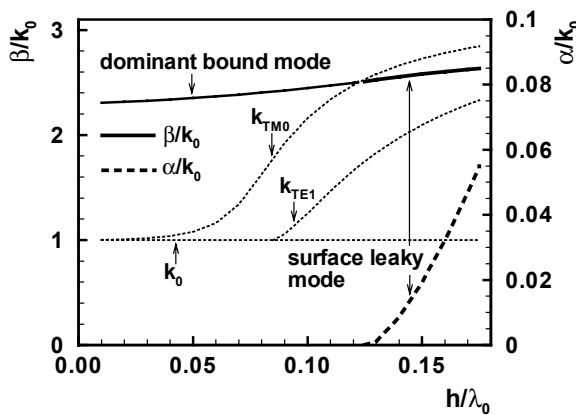


Fig. 12 Dispersion characteristics of a coplanar waveguide,  $\textcircled{4}$  in Fig. 1, when central strip width  $s=0.6$  mm, slot width  $w=0.25$  mm, substrate thickness  $h=1$  mm and permittivity  $\epsilon_r=10$ .

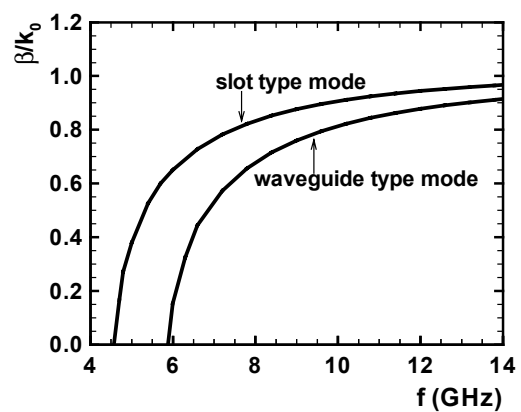


Fig. 15 Normalized phase constant of the even dominant slot type mode, and waveguide type mode on the shielded conductor-backed slotline,  $\textcircled{13}$  in Fig. 1, when slot width  $w=20$  mm, height of the shield  $2h=4$  mm, its width  $b=50$  mm and permittivity  $\epsilon_r=1$ .

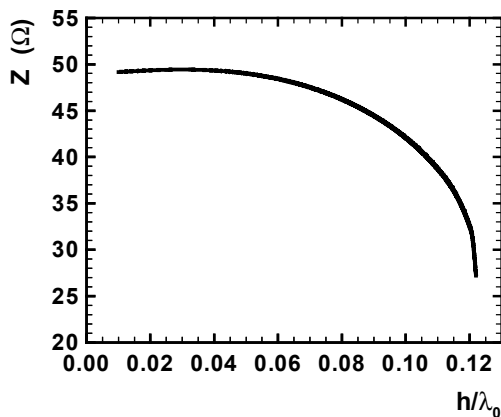


Fig. 13 Characteristic impedance of a coplanar waveguide specified in Fig. 12.

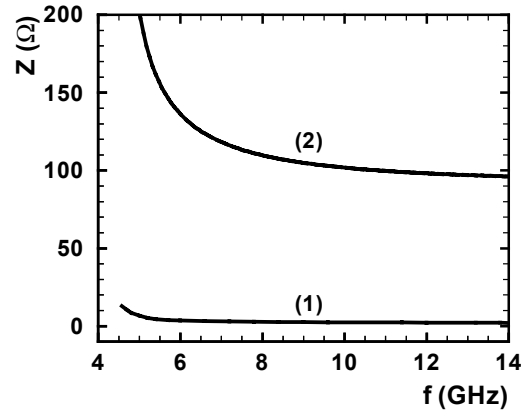


Fig. 16 The characteristic impedance (1) of the line specified in Fig. 15 with the slot type mode, and (2) of the line when  $w=1$  mm,  $2h=10$  mm,  $b=23$  mm,  $\epsilon_r=1$ , on which the slot type mode propagates.

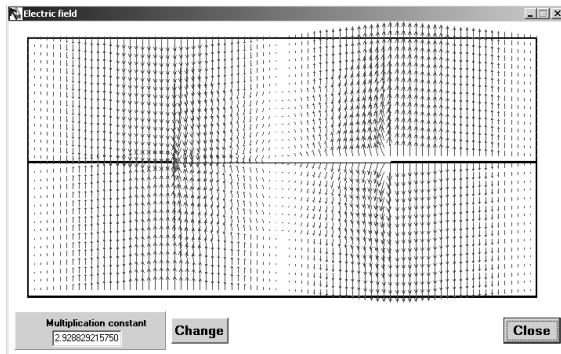


Fig. 17 Electric field of the even slot type dominant mode on the cross-sectional plane of the wide slotted line specified in Fig. 15 at  $f=7.5$  GHz.

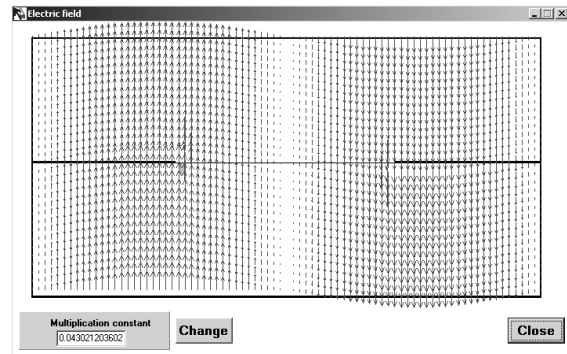


Fig. 18 Electric field of the even perturbed waveguide type mode on the cross-sectional plane of the wide slotted line specified in Fig. 15 at  $f=7.5$  GHz.

## CONCLUSION

The authors think that the APTL program provides a much more complex view on the line behaviour from more points of view than other programs, and gives a realistic picture of their characteristics, including leakage effects occurring in the substrate or in space. The current menu of code results from our recent research demands. However, the system is open and can be extended at any time by adding further types of lines. Particular modes are studied in the source-free region on longitudinally and transversally unbounded lossless lines. The influence of dielectric losses has been incorporated. Conductor losses have been cut out due to the negligibly small thickness of the metallization, which is a basic assumption of the spectral domain method. The most complex code dealing with such lines might result from a combination of our concept with the approach of D. R. Jackson's group at the University of Houston, Texas, to the analysis of open planar transmission lines, accounting for excitation of waves by a real source, particularly in the near zone. In addition we provide an experimental verification of the wave propagation on some open planar transmission lines made on enlarged models.

## ACKNOWLEDGEMENT

This work has been supported by the Grant Agency of the Czech Republic under project 102/03/0449 "New circuit devices for communication technology".

## REFERENCES

- [1] M. Tsuji, H. Shigesawa: Leaky Mode Missing From EM Simulators for Planar Circuits, 2003 IEEE MTT-S Int. Microwave Symp. Digest, pp. 661-664, vol. 2, June 2003, Philadelphia, PA.
- [2] T. Itoh: Numerical Techniques for Microwave and Millimeter-Wave Passive Structures, John Wiley & Sons, New York, 1989.
- [3] T. Itoh, R. Mittra: Dispersion Characteristics of Slotlines, Electron. Lett., vol. 7, 1971, pp. 364-365.
- [4] K. C. Gupta, R. Garg, I. J. Bahl: Microstrip Lines and Slotlines, Artech House, Dedham, 1979.
- [5] J. B. Knorr, K. D. Kuchler: Analysis of Coupled Slots and Coplanar Strips on Dielectric Substrates, IEEE Trans. Microwave Theory Tech., vol. MTT-23, 1975, pp. 541-548.76